

ISO 17025 | NADCAP AAMA Component Testing CAGE 5HSJ7

www.assuredtesting.com 388 Servidea Drive Ridgway, PA 15853 USA P: +1 814-773-3224 F: +1 814-773-3225

Customer: Basecrete Technologies

Purchase Order# 855463

Quote #: 011922BCT

Primary Contact: Vito Mariano

BILL TO: FLSARASOT--2835

Basecrete Technologies 6148 Clark Center Ave Sarasota FL 34238

USA

Ph: 941.879.4600

SENT TO: FLSARASOT--2835

Basecrete Technologies 6148 Clark Center Ave Sarasota FL 34238

USA

Ph: 941.879.4600

Entry Date: Friday, January 28, 2022

TEST REPORT - 32410

Pull Off Adhesion IAW ASTM D4541 (2017), Method E, Type 4. Base layer is black, middle layer is gray and top layer is blue.

See attached photos.

Part and Test Information

Test Result	Test Name/Procedure	Adhesion ASTM D4541-17 Method E Pull-off Strength
Results: See below. Sample 1:	Requirement Specification	Unspecified
	Customer Material Specification	
1) 511 psi - 100% topcoat removal with cohesive gray	Part Numbe	r
2) 669 psi - 100% topcoat removal with cohesive gray	Lot Numbe	r
3) 793 psi - 100% topcoat removal with slight cohesive gray	Sample Description	9.5" x 16" cement samples
Sample 2:	In Date	e 03-Feb-22
1) 592 psi - 100% topcoat removal with cohesive gray 2) 649 psi - 100% topcoat removal with cohesive gray	Out Dat	04-Feb-22
3) 482 psi - 100% topcoat removal with slight cohesive gray	Test Cour	
	Return Coun	
Requirements: No pass / fail criteria provided. Report results and psi.	Cycles	Hours
	Required	Required
,	Hours/Cycle	Completed
	Completed	

Michele Singer
Assistant Laboratory Manager

End Of Report

Issue Date:


2/10/2022

Test results apply only to the item(s) as received and as tested. If Assured Testing Services needs to manipulate a test item dimensionally for the purpose of equipment parameters the results only apply to the portion that is tested. When Information supplied by the customer could affect test results, the customer is responsible for the determining validity of the reported results. Information and statements in this report are derived from material, information, and/or specifications furnished by the client and exclude any expressed or implied warranties as to the fitness of material tested or analyzed for any particular purpose or use. This report is confidential property of our client and may not be used for advertising purposes. This report shall not be reproduced except in full, without written approval of this laboratory. This recording of false, fictitious or fraudulent statements or entries on this document may be punished as a felony. Sample remnants are retained for a minimum of 6 months following issuance of test results, at which point they will be discarded unless notified in writing by the client. Any client claims or damages arising from the use of information in this report are strictly limited to the cost of the services provided by Assured Testing Services.

Revision: 8/6/2019

Page 1 of 1 Printed 2/10/2022 3:12:27 PM

Assured Testing Services, Ridgway, PA TR32410 Basecrete Technologies Photos of 9.5" x 16" Samples tested for Pull Off Adhesion IAW ASTM D4541-17 Method E Type 4

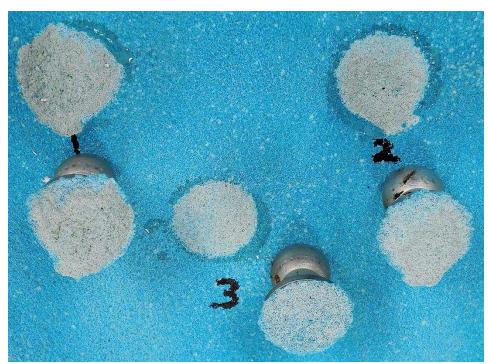

Sample 1: Three individual completed tests with corresponding dollies after pull-off adhesion – (See above)



Sample 2: Three individual completed tests with corresponding dollies after pull-off adhesion - (See above)

End of Photo Page